

COLD SEAL

Superior Adhesion in Cold Weather

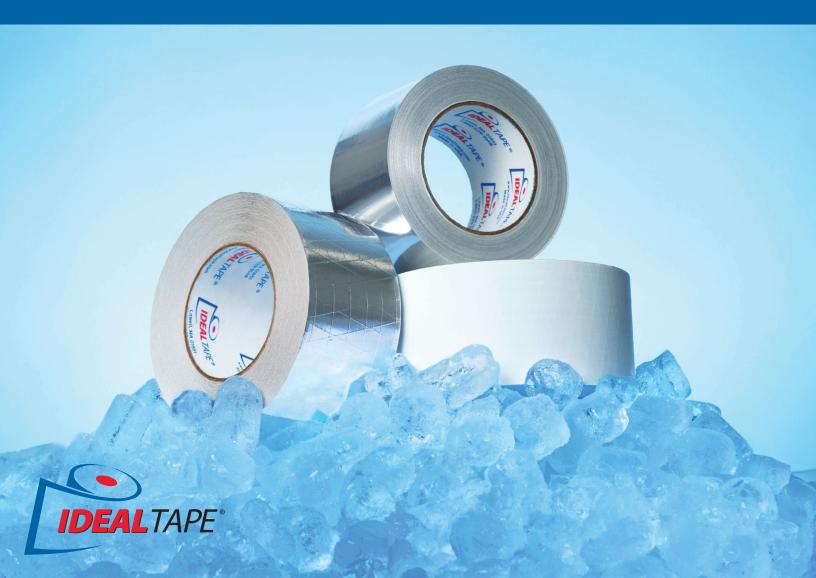

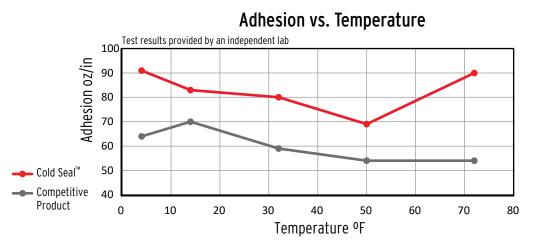

Superior Performance in Cold Weather is Just the Tip of the Iceberg

Ideal Tape Cold Seal tapes deliver high performance in extreme conditions. Our acrylic adhesive system excels in demanding applications across a wide range of temperatures and the conformable foil provides easy application on irregular surfaces.

- High performance, cold weather acrylic adhesive system, on average 25% stronger than the competition
- Heavy weight, easy release liner

- UL 723 rated
- Operating temperature range -35°F to +250°F
- Coast Guard Approval on 788 and 791

PRODUCT NUMBER	DESCRIPTION	COLOR	ADHESIVE SYSTEM	TOTAL THICKNESS mils (mm)	ADHESION TO STEEL oz/in (N/25mm)	TENSILE STRENGTH Ibs/in (N/25mm)	CLASSIFICATIONS
728 ASJ	White Kraft/Scrim/Foil backing for use with ASJ facing duct, insulation and jacketing	White	Cold Seal™ Acrylic	9 (0.23)	100 (27)	45 (197)	UL Classified ULC Classified UL 723 Rated
729 ASJ+	White Metallized Polypropylene/ Scrim/Foil backing for use with WMP facing duct, insulation and jacketing	White	Cold Seal™ Acrylic	10 (0.25)	73 (20)	65 (289)	UL Classified ULC Classified UL 723 Rated
788	Dead soft aluminum foil designed for sealing seams, patching and seaming HVAC systems	Aluminum	Cold Seal™ Acrylic	3.5 (0.09)	90 (25)	20 (88)	UL Classified ULC Classified UL 723 Rated USCG COA Number 164.112/161/0
791 FSK	Foil/Scrim/Kraft backing for use with FSK facing duct, insulation and jacketing	Aluminum	Cold Seal™ Acrylic	6 (0.15)	100 (27)	40 (178)	UL Classified ULC Classified UL 723 Rated USCG COA Number 164.112/162/0



800-229-9148 WWW.IDEALTAPE.COM IdealCustSvc@abitape.com